

# MODUS-S



## Standard Colours



Ral 9016

Ral 9006

Ral 9005



## OPTICAL

Direct symmetrical distribution  
 Beam angle 36°  
 UGR<22  
 Luminous efficacy >100 lm/W  
 Lifetime (L90/B10): 50000 h.(tq+25°C)  
 Lifetime (L80/B20): 100000 h. (tq+25°C)  
 COB LED module  
 Color rendering index: CRI>80  
 MacAdams SDCM 3

## MECHANICAL

Extruded aluminium profile housing  
 Electrostatic powder painted  
 Aluminium reflector  
 IP40 protection degree  
 Impact resistance IK02  
 Glow-wire test resistance 650°C

## ELECTRICAL



Halogen-free wiring  
 220-240V-50/60Hz  
 Power factor >0.95  
 Constant current, Class I,  
 Driver inside the housing  
 CE - IEC 60598-1 - EN 60598-1  
 Ambient temperature from -20°C to +50°C  
 On-Off Control - (Code: .N000)

## OPTIONAL

Color rendering index: CRI >90  
 Color temperature (K) options  
 RAL colour selection

## INSTALLATION

Ceiling suspended mounted.

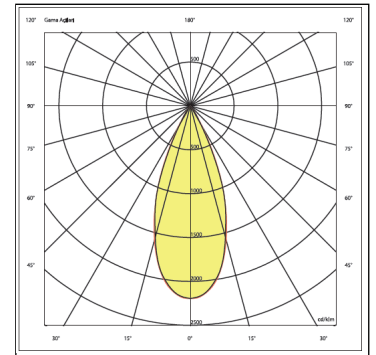

Product Code	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions	Cut-Out WxL (mm)	Weight (kg)
05648.97.30.018	14	1560	3000K	Ra>80	97x241	N/A	1,6

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.

Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.