

DRAGON



Standard Colours



OPTICAL

Adjustable 90 degrees vertical
Rotatable 350 degrees horizontal
Beam angle 24°
Luminous efficacy >100 lm/W
Lifetime (L90/B10): 50000 h. (tq+25°C)
Lifetime (L80/B20): 100000 h. (tq+25°C)
COB LED module
Color rendering index: CRI>80
MacAdams SDCM 3

MECHANICAL

Die-cast aluminium housing
Stainless steel installation clips
Aluminium reflector
Transparent diffuser
IP40 protection degree from below
Impact resistance IK02
Glow-wire test resistance 650°C

ELECTRICAL



Halogen-free wiring
220-240V-50/60Hz
Power factor >0.95
Constant current, Class I, isolated driver
CE - IEC 60598-1 - EN 60598-1
Ambient temperature from -20°C to +50°C
On-Off Control - (Code: .N000)

OPTIONAL

DALI - (Code: .DXXX)
1-10V - (Code: .MXXX)
Flicker-free - (Code: .FXXX)
Emergency battery - (Code.X3HT)
CBS connection
Color rendering index: CRI >90
Color temperature (K) options
GST type connector for installation
RAL colour selection

INSTALLATION

Ceiling recessed mounted.

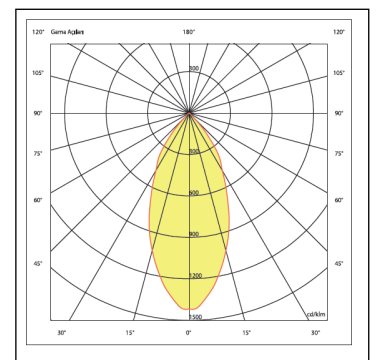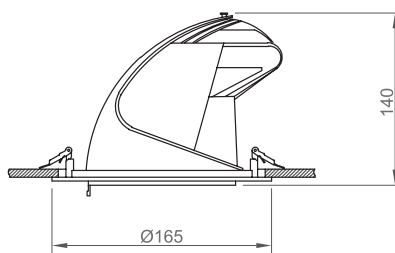

Product Code	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions QxH (mm)	Cut-Out Q (mm)	Weight (kg)
05310.16.40.034	30	3400	4000K	Ra>80	165x140	150	1,0

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.

Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.