





THE PERFECT
LIGHTING
SOLUTION FOR
EVERY CONTEXT.

NUMINOS®

ONE LIGHTING SYSTEM – A THOUSAND POSSIBILITIES.

THE FREELY CONFIGURABLE LIGHTING SYSTEM THAT
CASTS A GOOD LIGHT ON EVERY SETTING.

No two projects are the same. But many projects demand a coherent lighting and design concept. NUMINOS® is a perfectly coordinated lighting system that harmonises function, design and technology. For planners and doers. For every need. For maximum variety with minimum effort.

NUMINOS®

HIGH-PERFORMANCE LED MODULE
WITH BRILLIANT COLOUR RENDERING

WIDE SELECTION OF DOWNLIGHTS
AND SPOTS FOR A HARMONIOUS
DESIGN CONCEPT.



MORE FREEDOM WITH SYSTEM.

WHATEVER YOU'RE PLANNING – THE NUMINOS® LIGHTING SYSTEM CREATES SPACE FOR NEW IDEAS.



The NUMINOS® lighting system offers constant lighting characteristics and modern design for all uses:

- for office spaces
- shops & boutiques
- hotels & gastronomy
- at home
- and much more

From hotels and offices to commercial or private rooms. From application to technology to detailed design: one great feature is that the modular downlights and spotlights can be configured exactly as required, depending on the design or space in question. And the more multifaceted your project is, the more you benefit from the NUMINOS® lighting system.

Lighting that won't dominate.



NUMINOS®
GIMBLE M, DL
Product no.
1005945

NUMINOS®
Move S, DL
Product no.
1005340



**Highlights that
shine down.**



NUMINOS® XL, CL
Product no.
1005767

**Free for
all dimensions.**



NUMINOS®
ZOOM M, 3-circuit
Product no.
1006116

**Perfect for
suspending, and
height-adjustable.**



NUMINOS® XL, PD
Product no.
1005783


UNPARALLELED VARIETY, SHARED HIGHLIGHTS.

Choose between:

- Downlight or spotlight
- Various sizes and diameters
- Housing colours (black/white)
- Reflector variants
- Pivoting or rigid versions
- Performance classes

The different variants feature:

- High-performance LED module with the light colours 2700K/3000K/4000K
- Colour quality CRI>90
- Glare rating UGR min. <22

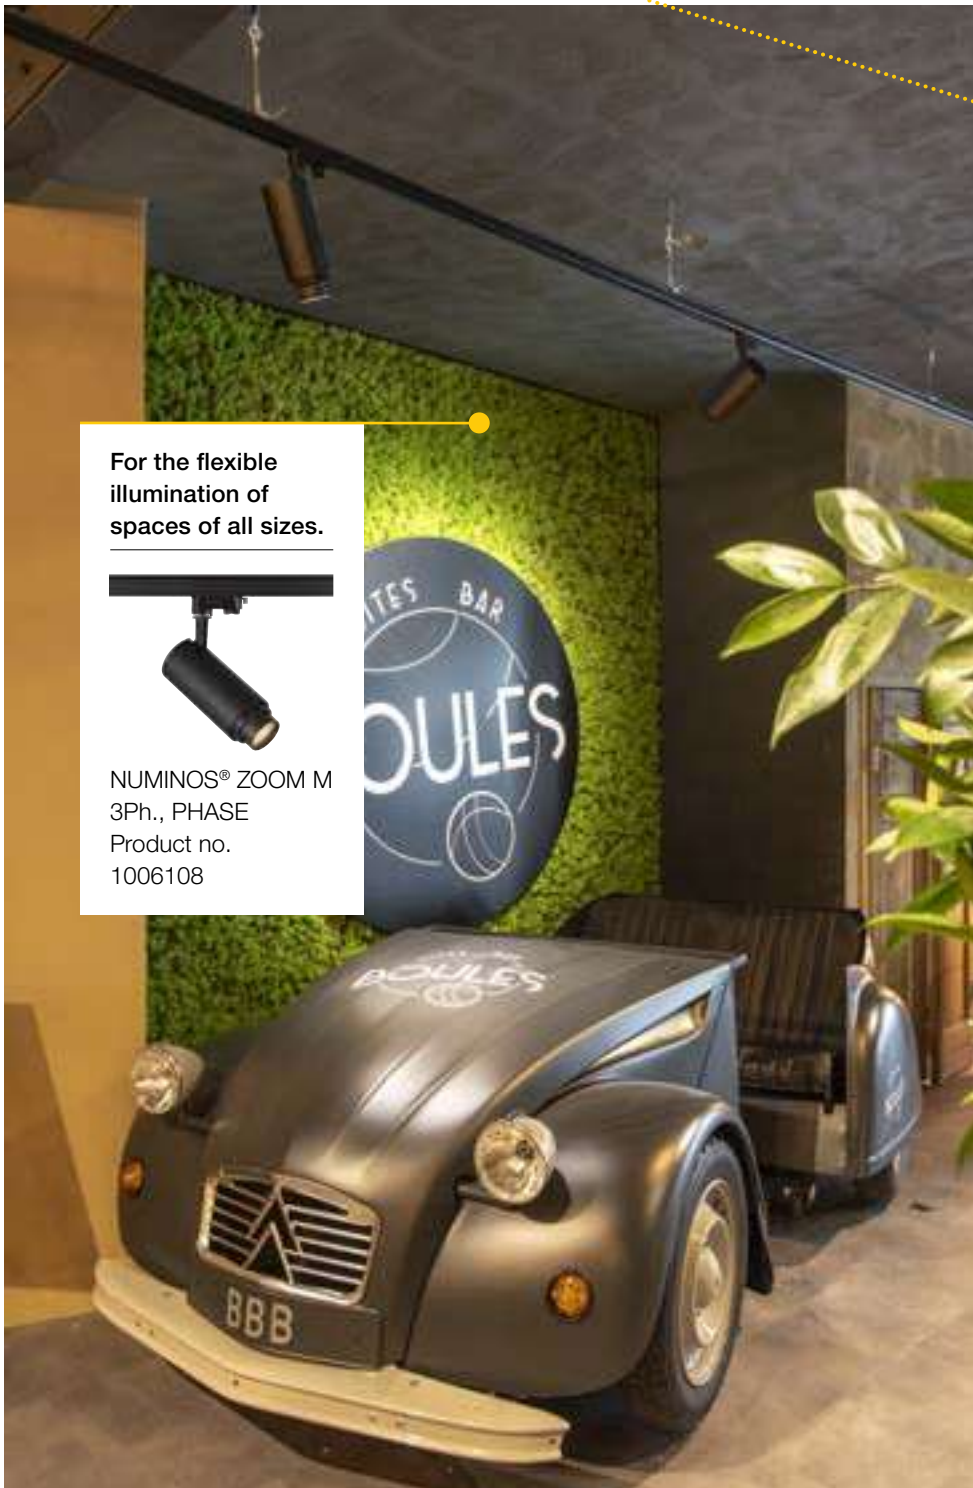

For the flexible illumination of spaces of all sizes.



NUMINOS® ZOOM M
3Ph., PHASE
Product no.
1006108

Products skilfully showcased.



NUMINOS® ZOOM M
3-circuit., DALI
Product no.
1006119

Spotlights.

Shops and boutiques as well as restaurants, bars, museums, studios, and surgeries – every space depends on expert accent lighting. Spotlights can be used to illuminate larger spaces as well as for targeted lighting.






To create
an appetising
atmosphere.



NUMINOS® M
PD, PHASE
Product no.
1004247
combined with
decorative ring
Product no.
1006168

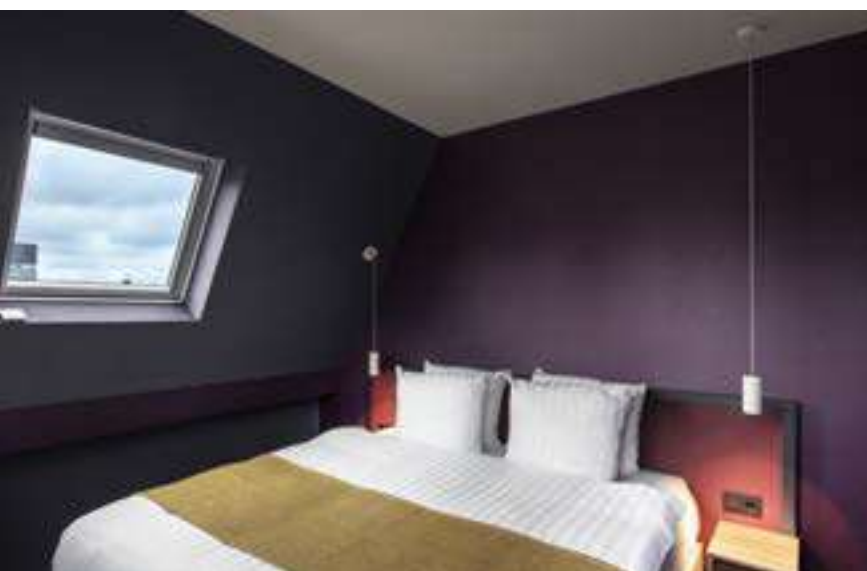

For a cosier home.



NUMINOS® S, PD, DALI
Prod. no.: 1004439
combined with decorative ring
Prod. no.: 1006167



SYSTEMATICALLY ACHIEVING YOUR OBJECTIVE.

With the NUMINOS® Online Configurator.


Our configurator really is this easy:
the first question is: downlight or spotlight?
You can then choose between preconfigured
and additionally customisable application
scenarios or free configuration.

If you are still unsure about the selection
of attributes, don't worry: we offer suitable
explanations for each selected configuration.

This way to the NUMINOS® Configurator:


www.numinos.SLV.com

Just three steps to reach your goal:

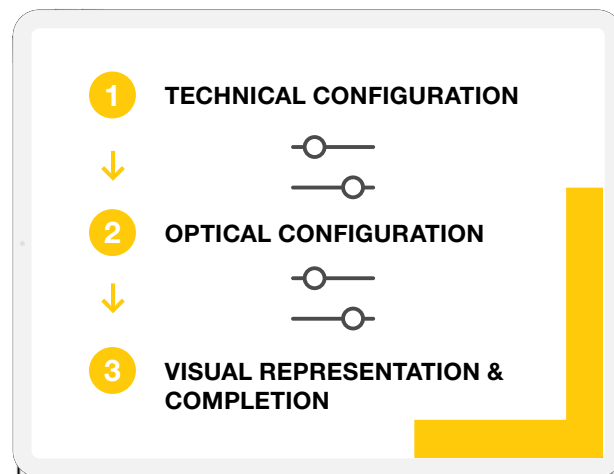

Reach your goal here and now – configure your lighting with the BIG WHITE® catalogue.


Put together your dream lighting over the next pages. The following product overviews will help you reach your goal just as easily: scroll to your desired light type, follow the columns from left to right and make your individual selection. At the end, you will find the relevant item number for direct ordering.

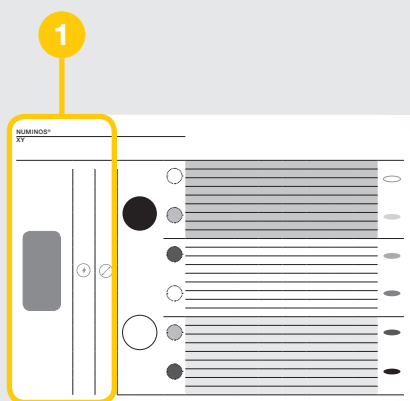

STEP 1

SPOTLIGHT OR DOWNLIGHT?


Choose the most suitable light type for your needs. The diameter (downlights) or housing size (spotlights) are coupled with the total wattage.

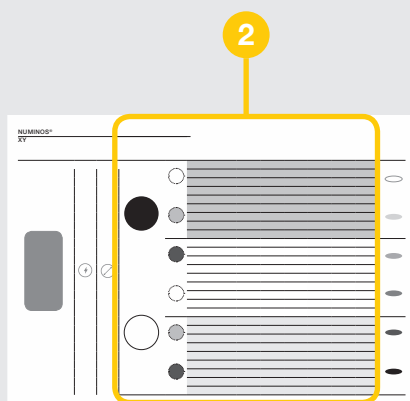

STEP 2

TECHNICAL CONFIGURATION & SELECTION OF DETAILS

Column by column, you can select optical and technical attributes such as housing colour or decorative colours, the colour temperature, half beam angle and more.

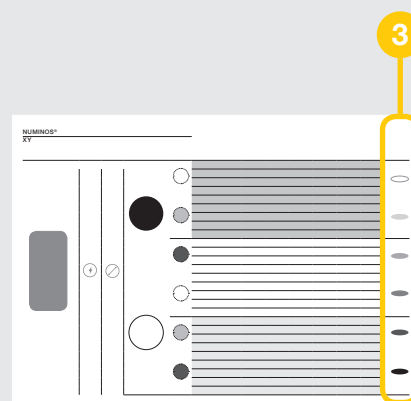

STEP 3

PRODUCT

Get a visual impression of your fully configured light and order it right away using the relevant item number.

STILL UNSURE ABOUT SOMETHING?



Scan me to view a video that shows how to configure NUMINOS® lights.

In addition to the familiar catalog icons, you will find the following icons in this chapter:



Glare rating



Colour temperature



Beam angle



Lumen



Controller

NUMINOS® S



3-circuit

Product details:

220-240V ~50/60Hz | 250mA

Total wattage: 11W



Material: aluminium/polycarbonate (PC)



L80B50

350°

90°

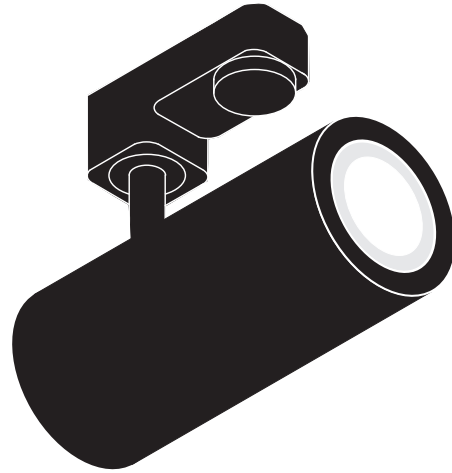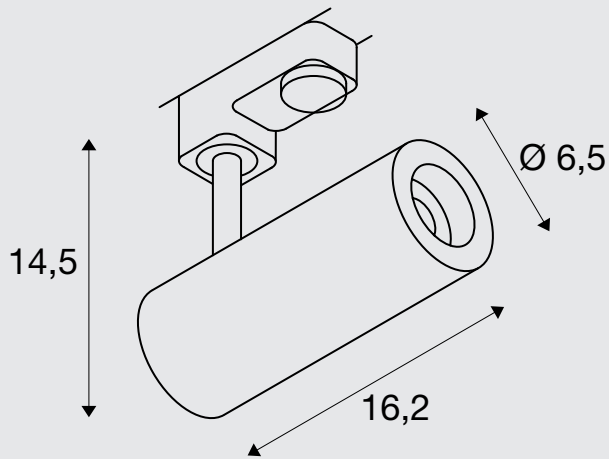

■ black

Tip:


Decorative ring also available in white



Decorative ring S

□ white

Prod. no. 1006167

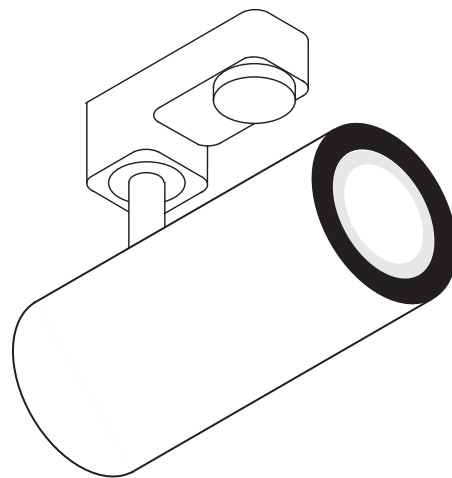

□ white



PROD. NO.



			985lm	24°	16	1004074
A F	2700 K		985lm	36°	16	1004075
			980lm	60°	19	1004076
A E	3000 K		1020lm	24°	13	1004082
			1020lm	36°	13	1004083
			1020lm	60°	19	1004084
A E	4000 K		1100lm	24°	16	1004090
			1100lm	36°	16	1004091
			1100lm	60°	19	1004092



			985lm	24°	16	1004362
A F	2700 K		985lm	36°	16	1004363
			980lm	60°	19	1004364
A E	3000 K		1020lm	24°	13	1004370
			1020lm	36°	13	1004371
			1020lm	60°	19	1004372
A E	4000 K		1100lm	24°	16	1004378
			1100lm	36°	16	1004379
			1100lm	60°	19	1004380



			985lm	24°	16	1004078
A F	2700 K		985lm	36°	16	1004079
			980lm	60°	19	1004080
A E	3000 K		1020lm	24°	13	1004086
			1020lm	36°	13	1004087
			1020lm	60°	19	1004088
A E	4000 K		1100lm	24°	16	1004094
			1100lm	36°	16	1004095
			1100lm	60°	19	1004096



			985lm	24°	16	1004366
A F	2700 K		985lm	36°	16	1004367
			980lm	60°	19	1004368
A E	3000 K		1020lm	24°	13	1004374
			1020lm	36°	13	1004375
			1020lm	60°	19	1004376
A E	4000 K		1100lm	24°	16	1004382
			1100lm	36°	16	1004383
			1100lm	60°	19	1004384



NUMINOS® M




3-circuit

Product details:

220-240V ~50/60Hz | 500mA

Total wattage: 20W

Material: aluminium/polycarbonate (PC)

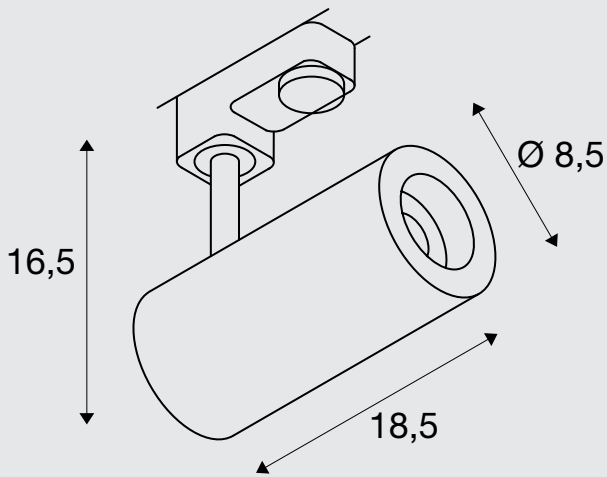

Tip:


Decorative ring also available in white




Decorative ring M

white

Prod. no. 1006168

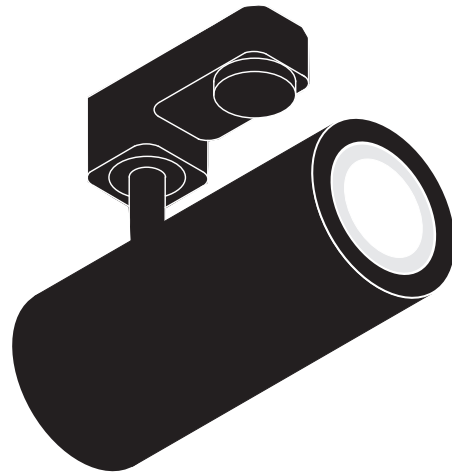

black

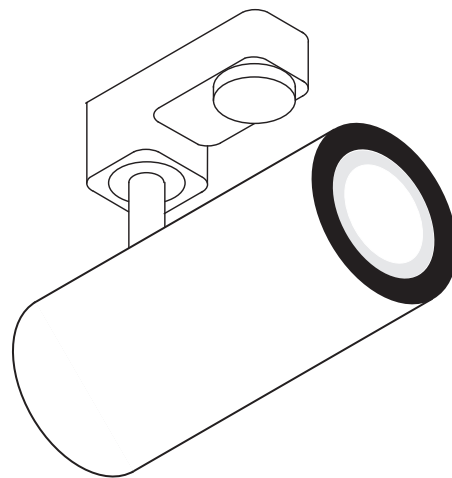

white



PROD. NO.



			1925lm	24°	16	1004170
	2700 K		1935lm	36°	16	1004171
			1885lm	60°	22	1004172
	3000 K		1955lm	24°	16	1004178
			1970lm	36°	13	1004179
	4000 K		1880lm	60°	22	1004180
			2125lm	24°	19	1004186
	4000 K		2120lm	36°	16	1004187
			2060lm	60°	25	1004188



			1925lm	24°	16	1004458
	2700 K		1935lm	36°	16	1004459
			1885lm	60°	22	1004460
	3000 K		1955lm	24°	16	1004466
			1970lm	36°	13	1004467
	4000 K		1880lm	60°	22	1004468
			2125lm	24°	19	1004474
	4000 K		2120lm	36°	16	1004475
			2060lm	60°	25	1004476



			1925lm	24°	16	1004174
	2700 K		1935lm	36°	16	1004175
			1885lm	60°	22	1004176
	3000 K		1955lm	24°	16	1004182
			1970lm	36°	13	1004183
	4000 K		1880lm	60°	22	1004184
			2125lm	24°	19	1004190
	4000 K		2120lm	36°	16	1004191
			2060lm	60°	25	1004192



			1925lm	24°	16	1004462
	2700 K		1935lm	36°	16	1004463
			1885lm	60°	22	1004464
	3000 K		1955lm	24°	16	1004470
			1970lm	36°	13	1004471
	4000 K		1880lm	60°	22	1004472
			2125lm	24°	19	1004478
	4000 K		2120lm	36°	16	1004479
			2060lm	60°	25	1004480



NUMINOS® L




3-circuit

Product details:

220-240V ~50/60Hz | 700mA

Total wattage: 28W

Material: aluminium/polycarbonate (PC)

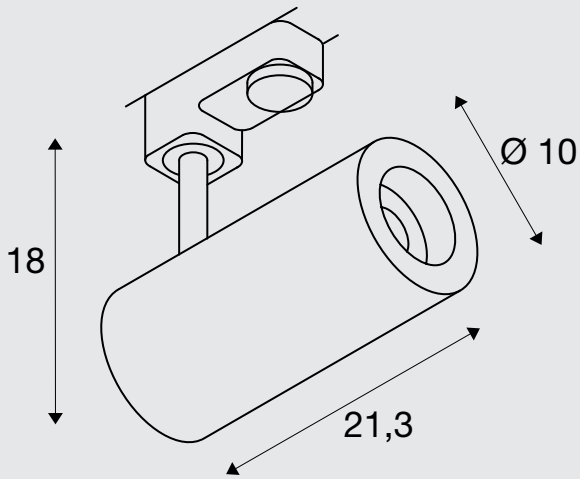

Tip:


Decorative ring also available in white




Decorative ring L

white

Prod. no. 1006169

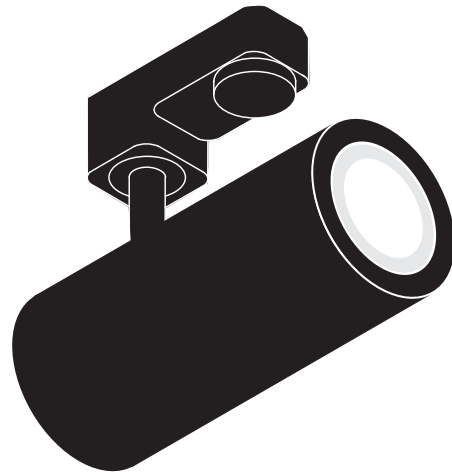

black

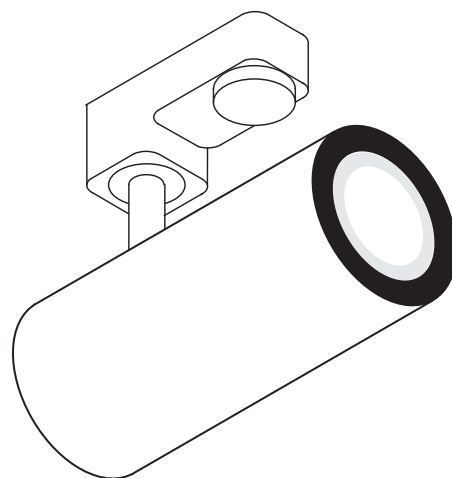

white



PROD. NO.



			2440lm	24°	19	1004266
	2700 K		2400lm	36°	19	1004267
			2475lm	60°	22	1004268
	3000 K		2430lm	24°	13	1004274
			2340lm	36°	13	1004275
	4000 K		2400lm	60°	22	1004276
			2675lm	24°	19	1004282
	4000 K		2620lm	36°	19	1004283
			2715lm	60°	22	1004284



			2440lm	24°	19	1004554
	2700 K		2400lm	36°	19	1004555
			2475lm	60°	22	1004556
	3000 K		2430lm	24°	13	1004562
			2340lm	36°	13	1004563
	4000 K		2400lm	60°	22	1004564
			2675lm	24°	19	1004570
	4000 K		2620lm	36°	19	1004571
			2715lm	60°	22	1004572



			2440lm	24°	19	1004270
	2700 K		2400lm	36°	19	1004271
			2475lm	60°	22	1004272
	3000 K		2430lm	24°	13	1004278
			2340lm	36°	13	1004279
	4000 K		2400lm	60°	22	1004280
			2675lm	24°	19	1004286
	4000 K		2620lm	36°	19	1004287
			2715lm	60°	22	1004288



			2440lm	24°	19	1004558
	2700 K		2400lm	36°	19	1004559
			2475lm	60°	22	1004560
	3000 K		2430lm	24°	13	1004566
			2340lm	36°	13	1004567
	4000 K		2400lm	60°	22	1004568
			2675lm	24°	19	1004574
	4000 K		2620lm	36°	19	1004575
			2715lm	60°	22	1004576



NUMINOS® XL

NEW VARIANT





3-circuit

Product details:

220-240V ~50/60Hz | 900mA

System output: 36W

Material: aluminium/polycarbonate (PC)

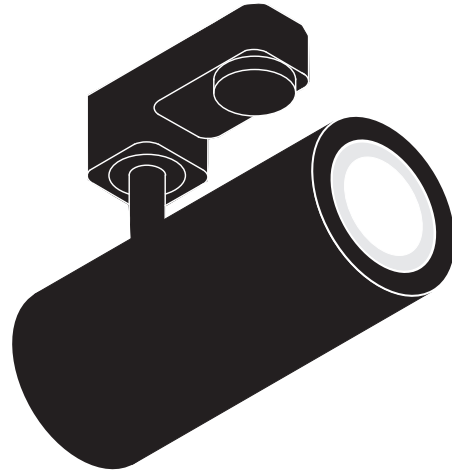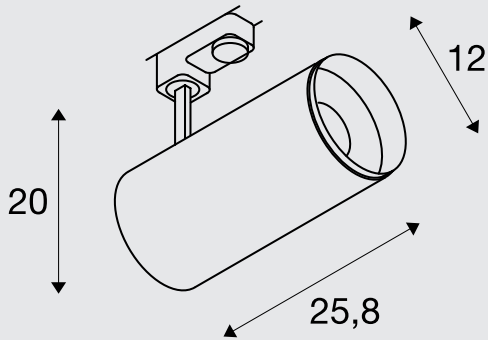

■ black

Tip:


Decorative ring also available in white



Decorative ring XL

□ white

Prod. no. 1006170

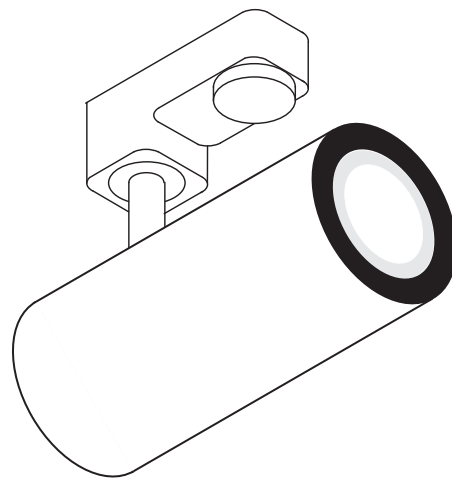

□ white



PROD. NO.



			3290lm	24°	19	1005723
A F	2700 K		3250lm	36°	19	1005724
			2980lm	60°	25	1005725
A E	3000 K		3530lm	24°	19	1005729
			3490lm	36°	19	1005730
			3210lm	60°	25	1005731
A E	4000 K		3800lm	24°	19	1005735
			3760lm	36°	19	1005736
			3460lm	60°	25	1005737



			3290lm	24°	19	1005795
A F	2700 K		3250lm	36°	19	1005796
			2980lm	60°	25	1005797
A E	3000 K		3530lm	24°	19	1005801
			3490lm	36°	19	1005802
			3210lm	60°	25	1005803
A E	4000 K		3800lm	24°	19	1005807
			3760lm	36°	19	1005808
			3460lm	60°	25	1005809



			3290lm	24°	19	1005726
A F	2700 K		3250lm	36°	19	1005727
			2980lm	60°	25	1005728
A E	3000 K		3530lm	24°	19	1005732
			3490lm	36°	19	1005733
			3210lm	60°	25	1005734
A E	4000 K		3800lm	24°	19	1005738
			3760lm	36°	19	1005739
			3460lm	60°	25	1005740



			3290lm	24°	19	1005798
A F	2700 K		3250lm	36°	19	1005799
			2980lm	60°	25	1005800
A E	3000 K		3530lm	24°	19	1005804
			3490lm	36°	19	1005805
			3210lm	60°	25	1005806
A E	4000 K		3800lm	24°	19	1005810
			3760lm	36°	19	1005811
			3460lm	60°	25	1005812



NUMINOS® ZOOM M

NEW

LED
INSIDE



3-circuit



Product details:

220-240V ~50/60Hz | 500mA


Total wattage: 20W

Material: aluminium/polycarbonate (PC)

- Half-peak divergence adjustable from 15°-60°.

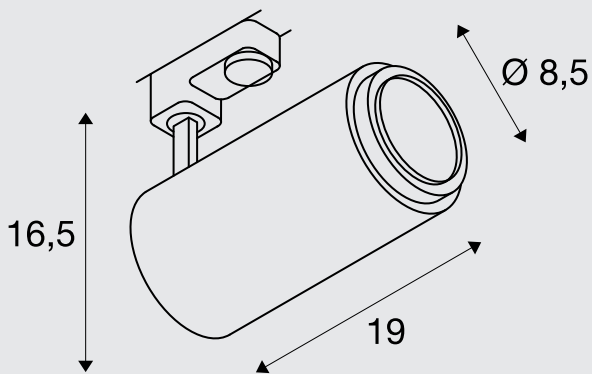

black



white





PROD. NO.



2700 K	680-1650lm	15°-60°	25	1006108
3000 K	750-1800lm	15°-60°	25	1006110
4000 K	780-1900lm	15°-60°	25	1006112



2700 K	680-1650lm	15°-60°	25	1006114
3000 K	750-1800lm	15°-60°	25	1006116
4000 K	780-1900lm	15°-60°	25	1006118



2700 K	680-1650lm	15°-60°	25	1006109
3000 K	750-1800lm	15°-60°	25	1006111
4000 K	780-1900lm	15°-60°	25	1006113



2700 K	680-1650lm	15°-60°	25	1006115
3000 K	750-1800lm	15°-60°	25	1006117
4000 K	780-1900lm	15°-60°	25	1006119



NUMINOS® S





CW

Product details:

220-240V ~50/60Hz | 250mA

Total wattage: 11W

Material: aluminium/polycarbonate (PC)

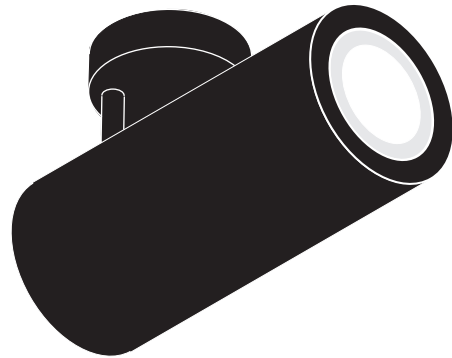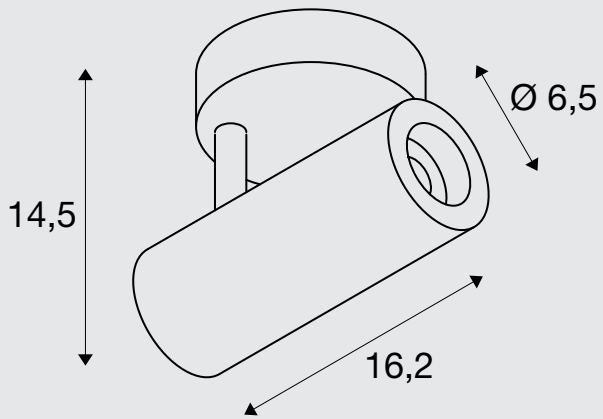

■ black

Tip:


Decorative ring also available in white



Decorative ring S

□ white

Prod. no. 1006167

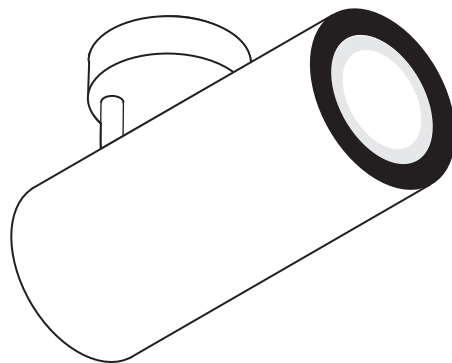

□ white



PROD. NO.



			985lm	24°	16	1004098
A F	2700 K		985lm	36°	16	1004099
			980lm	60°	19	1004100
A E	3000 K		1020lm	24°	13	1004106
			1020lm	36°	13	1004107
			1020lm	60°	19	1004108
A E	4000 K		1100lm	24°	16	1004114
			1100lm	36°	16	1004115
			1100lm	60°	19	1004116



			985lm	24°	16	1004386
A F	2700 K		985lm	36°	16	1004387
			980lm	60°	19	1004388
A E	3000 K		1020lm	24°	13	1004394
			1020lm	36°	13	1004395
			1020lm	60°	19	1004396
A E	4000 K		1100lm	24°	16	1004402
			1100lm	36°	16	1004403
			1100lm	60°	19	1004404



			985lm	24°	16	1004102
A F	2700 K		985lm	36°	16	1004103
			980lm	60°	19	1004104
A E	3000 K		1020lm	24°	13	1004110
			1020lm	36°	13	1004111
			1020lm	60°	19	1004112
A E	4000 K		1100lm	24°	16	1004118
			1100lm	36°	16	1004119
			1100lm	60°	19	1004120



			985lm	24°	16	1004390
A F	2700 K		985lm	36°	16	1004391
			980lm	60°	19	1004392
A E	3000 K		1020lm	24°	13	1004398
			1020lm	36°	13	1004399
			1020lm	60°	19	1004400
A E	4000 K		1100lm	24°	16	1004406
			1100lm	36°	16	1004407
			1100lm	60°	19	1004408



NUMINOS® M





CL

Product details:

220-240V ~50/60Hz | 500mA

Total wattage: 20W

Material: aluminium/polycarbonate (PC)

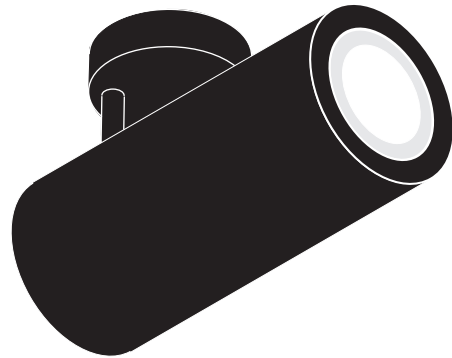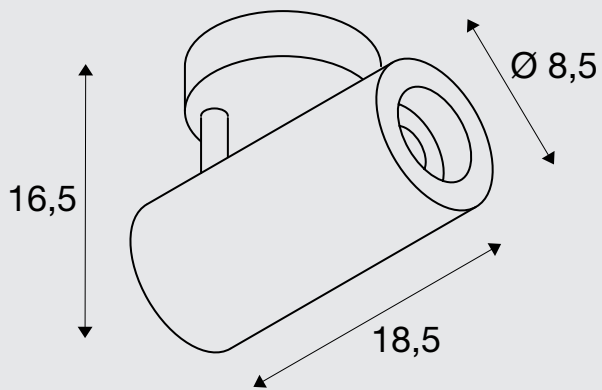

■ black

Tip:


Decorative ring also available in white



Decorative ring M

□ white

Prod. no. 1006168

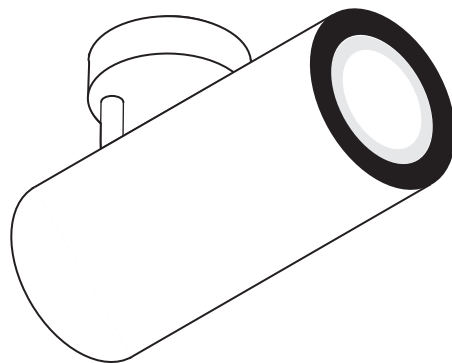

□ white



PROD. NO.



			1925lm	24°	16	1004194
	2700 K		1935lm	36°	16	1004195
			1885lm	60°	22	1004196
	3000 K		1955lm	24°	16	1004202
			1970lm	36°	13	1004203
	4000 K		1880lm	60°	22	1004204
			2125lm	24°	19	1004210
			2120lm	36°	16	1004211
			2060lm	60°	25	1004212



			1925lm	24°	16	1004482
	2700 K		1935lm	36°	16	1004483
			1885lm	60°	22	1004484
	3000 K		1955lm	24°	16	1004490
			1970lm	36°	13	1004491
	4000 K		1880lm	60°	22	1004492
			2125lm	24°	19	1004498
			2120lm	36°	16	1004499
			2060lm	60°	25	1004500



			1925lm	24°	16	1004198
	2700 K		1935lm	36°	16	1004199
			1885lm	60°	22	1004200
	3000 K		1955lm	24°	16	1004206
			1970lm	36°	13	1004207
	4000 K		1880lm	60°	22	1004208
			2125lm	24°	19	1004214
			2120lm	36°	16	1004215
			2060lm	60°	25	1004216



			1925lm	24°	16	1004486
	2700 K		1935lm	36°	16	1004487
			1885lm	60°	22	1004488
	3000 K		1955lm	24°	16	1004494
			1970lm	36°	13	1004495
	4000 K		1880lm	60°	22	1004496
			2125lm	24°	19	1004502
			2120lm	36°	16	1004503
			2060lm	60°	25	1004504



NUMINOS® L





CL

Product details:

220-240V ~50/60Hz | 700mA

Total wattage: 28W

Material: aluminium/polycarbonate (PC)

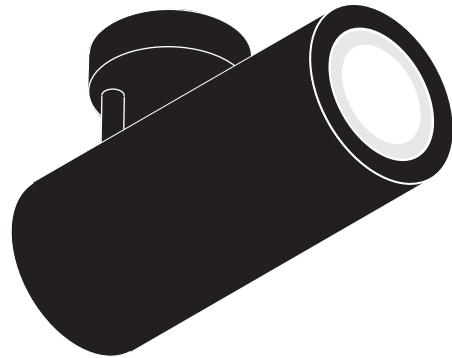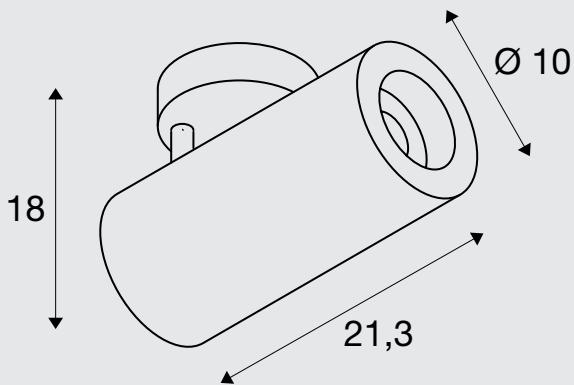

■ black

Tip:


Decorative ring also available in white



Decorative ring L

□ white

Prod. no. 1006169

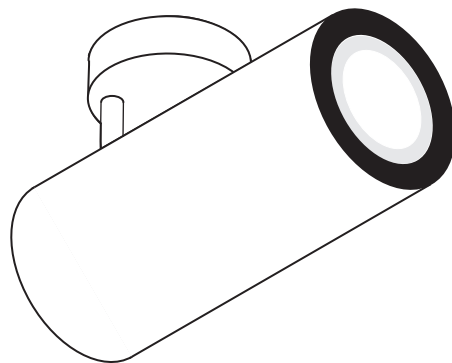

□ white



PROD. NO.



			2440lm	24°	19	1004290
	2700 K		2400lm	36°	19	1004291
			2475lm	60°	22	1004292
	3000 K		2430lm	24°	13	1004298
			2340lm	36°	13	1004299
	4000 K		2400lm	60°	22	1004300
			2675lm	24°	19	1004306
	4000 K		2620lm	36°	19	1004307
			2715lm	60°	22	1004308



			2440lm	24°	19	1004578
	2700 K		2400lm	36°	19	1004579
			2475lm	60°	22	1004580
	3000 K		2430lm	24°	13	1004586
			2340lm	36°	13	1004587
	4000 K		2400lm	60°	22	1004588
			2675lm	24°	19	1004594
	4000 K		2620lm	36°	19	1004595
			2715lm	60°	22	1004596



			2440lm	24°	19	1004294
	2700 K		2400lm	36°	19	1004295
			2475lm	60°	22	1004296
	3000 K		2430lm	24°	13	1004302
			2340lm	36°	13	1004303
	4000 K		2400lm	60°	22	1004304
			2675lm	24°	19	1004310
	4000 K		2620lm	36°	19	1004311
			2715lm	60°	22	1004312



			2440lm	24°	19	1004582
	2700 K		2400lm	36°	19	1004583
			2475lm	60°	22	1004584
	3000 K		2430lm	24°	13	1004590
			2340lm	36°	13	1004591
	4000 K		2400lm	60°	22	1004592
			2675lm	24°	19	1004598
	4000 K		2620lm	36°	19	1004599
			2715lm	60°	22	1004600



NUMINOS® XL

NEW VARIANT





CL

Product details:

220-240V ~50/60Hz | 900mA

System output: 36W

Material: aluminium/polycarbonate (PC)

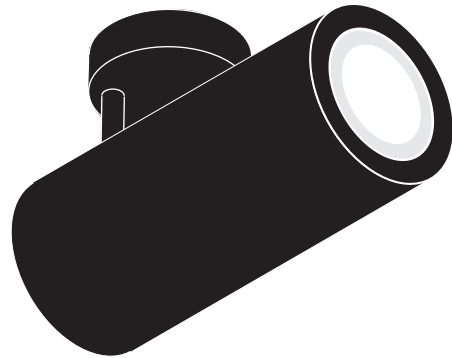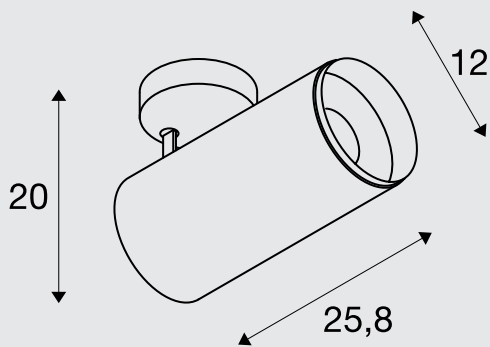

■ black

Tip:


Decorative ring also available in white



Decorative ring XL

□ white

Prod. no. 1006170

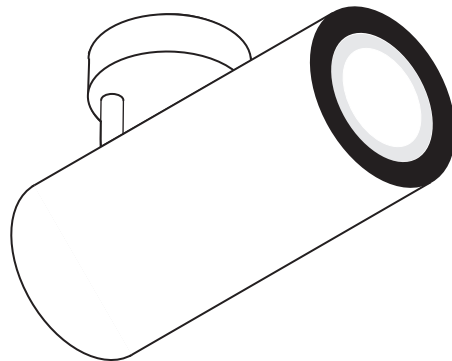

□ white



PROD. NO.



			3290lm	24°	19	1006083
A F	2700 K		3250lm	36°	19	1006084
			2980lm	60°	25	1006085
A E	3000 K		3530lm	24°	19	1006089
			3490lm	36°	19	1006090
			3210lm	60°	25	1006091
A E	4000 K		3800lm	24°	19	1006095
			3760lm	36°	19	1006096
			3460lm	60°	25	1006097



			3290lm	24°	19	1005741
A F	2700 K		3250lm	36°	19	1005742
			2980lm	60°	25	1005743
A E	3000 K		3530lm	24°	19	1005747
			3490lm	36°	19	1005748
			3210lm	60°	25	1005749
A E	4000 K		3800lm	24°	19	1005753
			3760lm	36°	19	1005754
			3460lm	60°	25	1005755



			3290lm	24°	19	1006086
A F	2700 K		3250lm	36°	19	1006087
			2980lm	60°	25	1006088
A E	3000 K		3530lm	24°	19	1006092
			3490lm	36°	19	1006093
			3210lm	60°	25	1006094
A E	4000 K		3800lm	24°	19	1006098
			3760lm	36°	19	1006099
			3460lm	60°	25	1006100



			3290lm	24°	19	1005744
A F	2700 K		3250lm	36°	19	1005745
			2980lm	60°	25	1005746
A E	3000 K		3530lm	24°	19	1005750
			3490lm	36°	19	1005751
			3210lm	60°	25	1005752
A E	4000 K		3800lm	24°	19	1005756
			3760lm	36°	19	1005757
			3460lm	60°	25	1005758



NUMINOS® S




CL

Product details:

220-240V ~50/60Hz | 250mA

Total wattage: 11W

Material: aluminium/polycarbonate (PC)

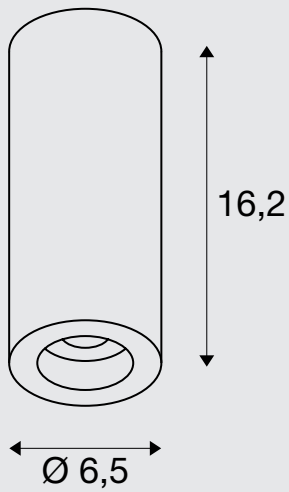

16,2

Ø 6,5



Tip:

Decorative ring also available in white

Decorative ring S

□ white

Prod. no. 1006167



■ black



□ white



PROD. NO.



			985lm	24°	16	1004122
	2700 K		985lm	36°	16	1004123
			980lm	60°	19	1004124
	3000 K		1020lm	24°	13	1004130
			1020lm	36°	13	1004131
			1020lm	60°	19	1004132
	4000 K		1100lm	24°	16	1004138
			1100lm	36°	16	1004139
			1100lm	60°	19	1004140



			985lm	24°	16	1004410
	2700 K		985lm	36°	16	1004411
			980lm	60°	19	1004412
	3000 K		1020lm	24°	13	1004418
			1020lm	36°	13	1004419
			1020lm	60°	19	1004420
	4000 K		1100lm	24°	16	1004426
			1100lm	36°	16	1004427
			1100lm	60°	19	1004428



			985lm	24°	16	1004126
	2700 K		985lm	36°	16	1004127
			980lm	60°	19	1004128
	3000 K		1020lm	24°	13	1004134
			1020lm	36°	13	1004135
			1020lm	60°	19	1004136
	4000 K		1100lm	24°	16	1004142
			1100lm	36°	16	1004143
			1100lm	60°	19	1004144



			985lm	24°	16	1004414
	2700 K		985lm	36°	16	1004415
			980lm	60°	19	1004416
	3000 K		1020lm	24°	13	1004422
			1020lm	36°	13	1004423
			1020lm	60°	19	1004424
	4000 K		1100lm	24°	16	1004430
			1100lm	36°	16	1004431
			1100lm	60°	19	1004432



NUMINOS® M



CL

Product details:


220-240V ~50/60Hz | 500mA

Total wattage: 20W

Material: aluminium/polycarbonate (PC)



L80B50

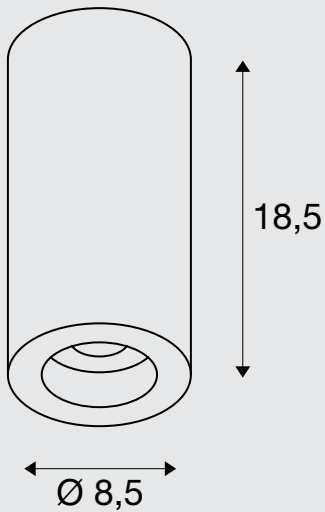

■ black

Tip:

Decorative ring also available in white



Decorative ring M

□ white

Prod. no. 1006168



□ white



PROD. NO.



			1925lm	24°	16	1004218
	2700 K		1935lm	36°	16	1004219
			1885lm	60°	22	1004220
	3000 K		1955lm	24°	16	1004226
			1970lm	36°	13	1004227
	4000 K		1880lm	60°	22	1004228
			2125lm	24°	19	1004234
	4000 K		2120lm	36°	16	1004235
			2060lm	60°	25	1004236



			1925lm	24°	16	1004506
	2700 K		1935lm	36°	16	1004507
			1885lm	60°	22	1004508
	3000 K		1955lm	24°	16	1004514
			1970lm	36°	13	1004515
	4000 K		1880lm	60°	22	1004516
			2125lm	24°	19	1004522
	4000 K		2120lm	36°	16	1004523
			2060lm	60°	25	1004524



			1925lm	24°	16	1004222
	2700 K		1935lm	36°	16	1004223
			1885lm	60°	22	1004224
	3000 K		1955lm	24°	16	1004230
			1970lm	36°	13	1004231
	4000 K		1880lm	60°	22	1004232
			2125lm	24°	19	1004238
	4000 K		2120lm	36°	16	1004239
			2060lm	60°	25	1004240



			1925lm	24°	16	1004510
	2700 K		1935lm	36°	16	1004511
			1885lm	60°	22	1004512
	3000 K		1955lm	24°	16	1004518
			1970lm	36°	13	1004519
	4000 K		1880lm	60°	22	1004520
			2125lm	24°	19	1004526
	4000 K		2120lm	36°	16	1004527
			2060lm	60°	25	1004528



NUMINOS® L



CL

Product details:


220-240V ~50/60Hz | 700mA

Total wattage: 28W

Material: aluminium/polycarbonate (PC)



L80B50

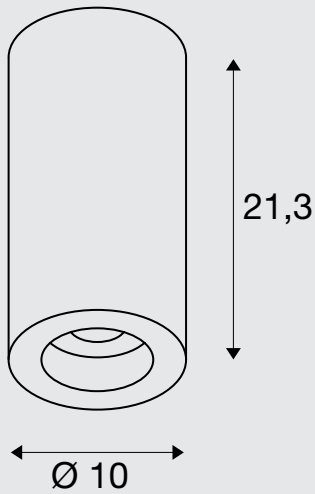

21,3

Ø 10



Tip:

Decorative ring also available in white

Decorative ring L

white

Prod. no. 1006169



black



white



PROD. NO.



			2440lm	24°	19	1004314
	2700 K		2400lm	36°	19	1004315
			2475lm	60°	22	1004316
	3000 K		2430lm	24°	13	1004322
			2340lm	36°	13	1004323
	4000 K		2400lm	60°	22	1004324
			2675lm	24°	19	1004330
	4000 K		2620lm	36°	19	1004331
			2715lm	60°	22	1004332



			2440lm	24°	19	1004602
	2700 K		2400lm	36°	19	1004603
			2475lm	60°	22	1004604
	3000 K		2430lm	24°	13	1004610
			2340lm	36°	13	1004611
	4000 K		2400lm	60°	22	1004612
			2675lm	24°	19	1004618
	4000 K		2620lm	36°	19	1004619
			2715lm	60°	22	1004620



			2440lm	24°	19	1004318
	2700 K		2400lm	36°	19	1004319
			2475lm	60°	22	1004320
	3000 K		2430lm	24°	13	1004326
			2340lm	36°	13	1004327
	4000 K		2400lm	60°	22	1004328
			2675lm	24°	19	1004334
	4000 K		2620lm	36°	19	1004335
			2715lm	60°	22	1004336



			2440lm	24°	19	1004606
	2700 K		2400lm	36°	19	1004607
			2475lm	60°	22	1004608
	3000 K		2430lm	24°	13	1004614
			2340lm	36°	13	1004615
	4000 K		2400lm	60°	22	1004616
			2675lm	24°	19	1004622
	4000 K		2620lm	36°	19	1004623
			2715lm	60°	22	1004624



NUMINOS® XL

NEW VARIANT



CL

Product details:


220-240V ~50/60Hz | 900mA

System output: 36W

Material: aluminium/polycarbonate (PC)



L80B50

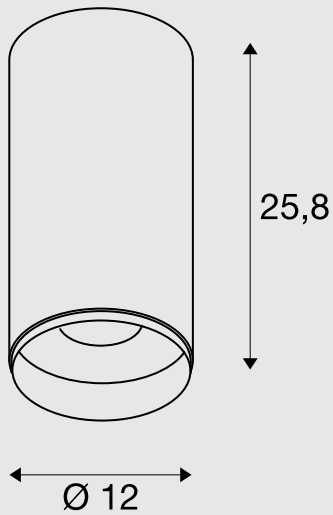

black

Tip:

Decorative ring also available in white



Decorative ring XL

white

Prod. no. 1006170



white



PROD. NO.



Energy Class	Temp (K)	Flux (lm)	Beam (°)	UGR	Prod. No.
		3290lm	24°	19	1005687
A → F	2700 K	3250lm	36°	19	1005688
		2980lm	60°	25	1005689
		3530lm	24°	19	1005693
A → E	3000 K	3490lm	36°	19	1005694
		3210lm	60°	25	1005695
		3800lm	24°	19	1005699
A → E	4000 K	3760lm	36°	19	1005700
		3460lm	60°	25	1005701



		3290lm	24°	19	1005759
A → F	2700 K	3250lm	36°	19	1005760
		2980lm	60°	25	1005761
		3530lm	24°	19	1005765
A → E	3000 K	3490lm	36°	19	1005766
		3210lm	60°	25	1005767
		3800lm	24°	19	1005771
A → E	4000 K	3760lm	36°	19	1005772
		3460lm	60°	25	1005773



		3290lm	24°	19	1005690
A → F	2700 K	3250lm	36°	19	1005691
		2980lm	60°	25	1005692
		3530lm	24°	19	1005696
A → E	3000 K	3490lm	36°	19	1005697
		3210lm	60°	25	1005698
		3800lm	24°	19	1005702
A → E	4000 K	3760lm	36°	19	1005703
		3460lm	60°	25	1005704



		3290lm	24°	19	1005762
A → F	2700 K	3250lm	36°	19	1005763
		2980lm	60°	25	1005764
		3530lm	24°	19	1005768
A → E	3000 K	3490lm	36°	19	1005769
		3210lm	60°	25	1005770
		3800lm	24°	19	1005774
A → E	4000 K	3760lm	36°	19	1005775
		3460lm	60°	25	1005776



NUMINOS® S





PD

Product details:

220-240V ~50/60Hz | 250mA

Total wattage: 11W

Material: aluminium/polycarbonate (PC)

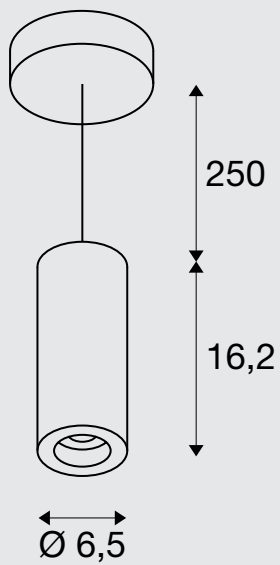

Tip:

Decorative ring also available in white


Decorative ring S

□ white

Prod. no. 1006167



■ black

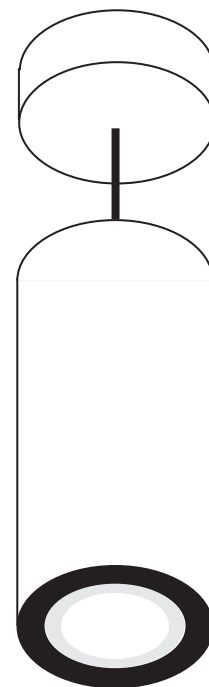

□ white



PROD. NO.



			985lm	24°	16	1004146
A F	2700 K		985lm	36°	16	1004147
			980lm	60°	19	1004148
A E	3000 K		1020lm	24°	13	1004154
			1020lm	36°	13	1004155
			1020lm	60°	19	1004156
A E	4000 K		1100lm	24°	16	1004162
			1100lm	36°	16	1004163
			1100lm	60°	19	1004164



			985lm	24°	16	1004434
A F	2700 K		985lm	36°	16	1004435
			980lm	60°	19	1004436
A E	3000 K		1020lm	24°	13	1004442
			1020lm	36°	13	1004443
			1020lm	60°	19	1004444
A E	4000 K		1100lm	24°	16	1004450
			1100lm	36°	16	1004451
			1100lm	60°	19	1004452



			985lm	24°	16	1004150
A F	2700 K		985lm	36°	16	1004151
			980lm	60°	19	1004152
A E	3000 K		1020lm	24°	13	1004158
			1020lm	36°	13	1004159
			1020lm	60°	19	1004160
A E	4000 K		1100lm	24°	16	1004166
			1100lm	36°	16	1004167
			1100lm	60°	19	1004168



			985lm	24°	16	1004438
A F	2700 K		985lm	36°	16	1004439
			980lm	60°	19	1004440
A E	3000 K		1020lm	24°	13	1004446
			1020lm	36°	13	1004447
			1020lm	60°	19	1004448
A E	4000 K		1100lm	24°	16	1004454
			1100lm	36°	16	1004455
			1100lm	60°	19	1004456



NUMINOS® M





PD

Product details:

220-240V ~50/60Hz | 500mA

Total wattage: 20W

Material: aluminium/polycarbonate (PC)

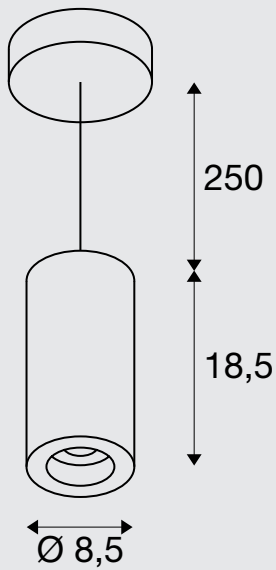

Tip:

Decorative ring also available in white


Decorative ring M

white

Prod. no. 1006168



black

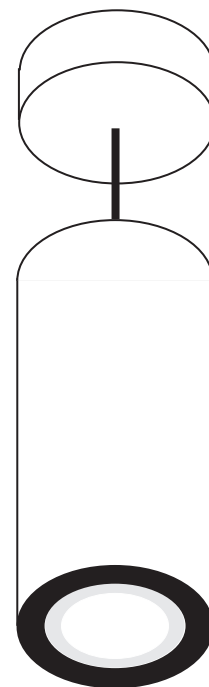

white



PROD. NO.



			1925lm	24°	16	1004242
	2700 K		1935lm	36°	16	1004243
			1885lm	60°	22	1004244
	3000 K		1955lm	24°	16	1004250
			1970lm	36°	13	1004251
	4000 K		1880lm	60°	22	1004252
			2125lm	24°	19	1004258
	4000 K		2120lm	36°	16	1004259
			2060lm	60°	25	1004260



			1925lm	24°	16	1004530
	2700 K		1935lm	36°	16	1004531
			1885lm	60°	22	1004532
	3000 K		1955lm	24°	16	1004538
			1970lm	36°	13	1004539
	4000 K		1880lm	60°	22	1004540
			2125lm	24°	19	1004546
	4000 K		2120lm	36°	16	1004547
			2060lm	60°	25	1004548



			1925lm	24°	16	1004246
	2700 K		1935lm	36°	16	1004247
			1885lm	60°	22	1004248
	3000 K		1955lm	24°	16	1004254
			1970lm	36°	13	1004255
	4000 K		1880lm	60°	22	1004256
			2125lm	24°	19	1004262
	4000 K		2120lm	36°	16	1004263
			2060lm	60°	25	1004264



			1925lm	24°	16	1004534
	2700 K		1935lm	36°	16	1004535
			1885lm	60°	22	1004536
	3000 K		1955lm	24°	16	1004542
			1970lm	36°	13	1004543
	4000 K		1880lm	60°	22	1004544
			2125lm	24°	19	1004550
	4000 K		2120lm	36°	16	1004551
			2060lm	60°	25	1004552



NUMINOS® L





PD

Product details:

220-240V ~50/60Hz | 700mA

Total wattage: 28W

Material: aluminium/polycarbonate (PC)

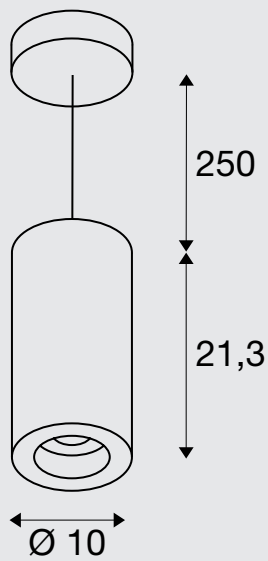

Tip:

Decorative ring also available in white


Decorative ring L

white

Prod. no. 1006169



black

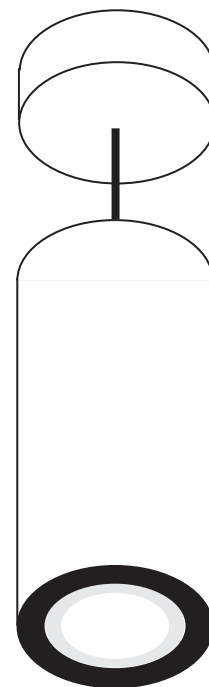

white



PROD. NO.



			2440lm	24°	19	1004338
	2700 K		2400lm	36°	19	1004339
			2475lm	60°	22	1004340
	3000 K		2430lm	24°	13	1004346
			2340lm	36°	13	1004347
	4000 K		2400lm	60°	22	1004348
			2675lm	24°	19	1004354
	4000 K		2620lm	36°	19	1004355
			2715lm	60°	22	1004356



			2440lm	24°	19	1004626
	2700 K		2400lm	36°	19	1004627
			2475lm	60°	22	1004628
	3000 K		2430lm	24°	13	1004634
			2340lm	36°	13	1004635
	4000 K		2400lm	60°	22	1004636
			2675lm	24°	19	1004642
	4000 K		2620lm	36°	19	1004643
			2715lm	60°	22	1004644



			2440lm	24°	19	1004342
	2700 K		2400lm	36°	19	1004343
			2475lm	60°	22	1004344
	3000 K		2430lm	24°	13	1004350
			2340lm	36°	13	1004351
	4000 K		2400lm	60°	22	1004352
			2675lm	24°	19	1004358
	4000 K		2620lm	36°	19	1004359
			2715lm	60°	22	1004360



			2440lm	24°	19	1004630
	2700 K		2400lm	36°	19	1004631
			2475lm	60°	22	1004632
	3000 K		2430lm	24°	13	1004638
			2340lm	36°	13	1004639
	4000 K		2400lm	60°	22	1004640
			2675lm	24°	19	1004646
	4000 K		2620lm	36°	19	1004647
			2715lm	60°	22	1004648



NUMINOS® XL

NEW VARIANT





PD

Product details:

220-240V ~50/60Hz | 900mA

System output: 36W

Material: aluminium/polycarbonate (PC)

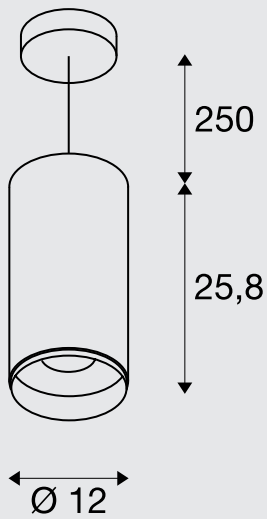

Tip:

Decorative ring also available in white


Decorative ring XL

white

Prod. no. 1006170



black

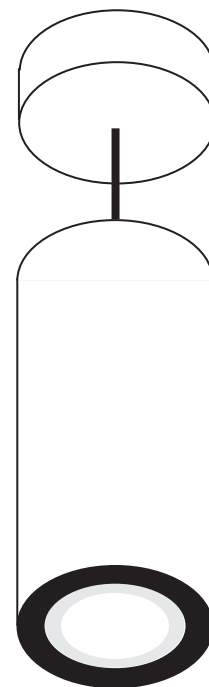

white



PROD. NO.

		2700 K	3290lm	24°	19	1005705
			3250lm	36°	19	1005706
			2980lm	60°	25	1005707
		3000 K	3530lm	24°	19	1005711
			3490lm	36°	19	1005712
			3210lm	60°	25	1005713
		4000 K	3800lm	24°	19	1005717
			3760lm	36°	19	1005718
			3460lm	60°	25	1005719



		2700 K	3290lm	24°	19	1005777
			3250lm	36°	19	1005778
			2980lm	60°	25	1005779
		3000 K	3530lm	24°	19	1005783
			3490lm	36°	19	1005784
			3210lm	60°	25	1005785
		4000 K	3800lm	24°	19	1005789
			3760lm	36°	19	1005790
			3460lm	60°	25	1005791



		2700 K	3290lm	24°	19	1005708
			3250lm	36°	19	1005709
			2980lm	60°	25	1005710
		3000 K	3530lm	24°	19	1005714
			3490lm	36°	19	1005715
			3210lm	60°	25	1005716
		4000 K	3800lm	24°	19	1005720
			3760lm	36°	19	1005721
			3460lm	60°	25	1005722



		2700 K	3290lm	24°	19	1005780
			3250lm	36°	19	1005781
			2980lm	60°	25	1005782
		3000 K	3530lm	24°	19	1005786
			3490lm	36°	19	1005787
			3210lm	60°	25	1005788
		4000 K	3800lm	24°	19	1005792
			3760lm	36°	19	1005793
			3460lm	60°	25	1005794

