















TUBE a family of cylindrical shaped wall light, ceiling light and area light. The body components are made from extruded aluminium and LM6 aluminium which make them highly corrosion resistant to any extreme environment. **TUBE** is protected from the ingress of dust and water and are used in both outdoor and indoor environments. Fitted with COB LED in three color temperature from 2700K, 3000K or 4000K with high CRI. **TUBE** can solve many lighting tasks in modern architectural surrounds and are generally used in illuminating columns and facades. The pole lights give a great level of downward light with symmetric / asymmetric / side throw light distributions.







IP65	IP66	$\left(\frac{1}{2} \right)$	CE		AC	З SDCM	CRI >80	220 240 Vac 50/60Hz
IK <u>10</u> 08	IK <u>10</u>	IK 09 08	IK 09 07	IK <u>08</u> 07	IK 08 06			

Specification

- Designed, Manufactured and tested according to IEC 60598. .
- LM6 Die Cast Aluminium and Extruded Aluminium body. •
- Stainless steel screws. •
- Nano Ceramic surface conversion. Double layer coating. •
- .
- Safety glass cover. .
- Post-cured silicone gasket.
- High quality LED module and driver. •
- •
- Weather proof TPE grommet. Installation must be carried out according to the enclosed product manual.

Available Color


.

Black	(replace the last 2 digits of ordering code with O1)
Graphite	[replace the last 2 digits of ordering code with O2]
Dark Grey	(replace the last 2 digits of ordering code with O3)
Aluminium Silver	(replace the last 2 digits of ordering code with O4)
White	[replace the last 2 digits of ordering code with O6]
Wooden Brown	[replace the last 2 digits of ordering code with 07]

TUBE

Mini TUBE Wall Up/Downlight







Mini TUBE

Wall Downlight



Mini TUBE Bollard / Single Sided

216

Ø105

199

1100

1

- 199 -

Mini TUBE Bollard / Double Sided

78

150

Ø105


174 🛏

- 199

Mini TUBE

Wall Uplight





Mini TUBE Suspension







WALL LIGHT/ CEILING LIGHT/ BOLLARD

Mini TUBE – Wall Up/Downlight / 5001				
Mini TUBE – Wall Downlight / 5004				
Mini TUBE – Wall Uplight / 5044				
Mini TUBE – Surface Downlight / 4001				
Mini TUBE – Recess Downlight / 7312				
Mini TUBE – Suspension / 1001				
Mini TUBE – Bollard / Single Sided / 7144				
Mini TUBE – Bollard / Double Sided / 7145				
Luminaire Performance				
160 – 3300 lm				
10 - 28 W				
15 – 117 lm/W				
COB LED / High Power LED				
Beam Options				
Narrow Medium Wide Sharp Elliptical V Forward Throw Side Throw				
Color Temperature				
2700K/ 3000K/ 4000K				
Controller				
On-Off/ 1-10V/ DALI				

Mini TUBE Surface Downlight




Mini TUBE Recess Downlight



Accessories					
Ħ	Anchor bolt		Pre-wired Cable		


🗷Unilamp

TUBE

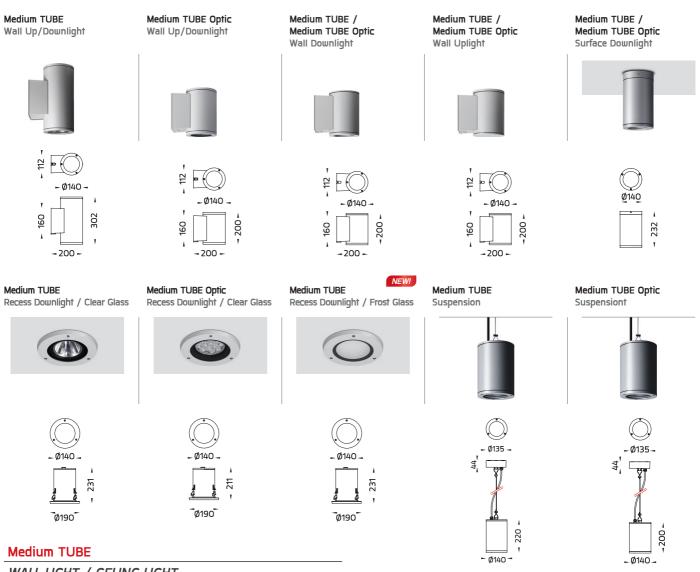

Medium TUBE – Wall Up/Downlight / 5002			
Medium TUBE Optic – Wall Up/Downlight / 5002			
Medium TUBE – Wall Downlight / 5005			
Medium TUBE Optic – Wall Downlight / 5005			
Medium TUBE – Wall Uplight / 5045			
Medium TUBE Optic – Wall Uplight / 5045			
Medium TUBE – Surface Downlight / 4002			
Medium TUBE Optic – Surface Downlight / 4002			
Medium TUBE – Recess Downlight / Clear Glass / 7350			
Medium TUBE Optic – Recess Downlight / Clear Glass / 7350			
Medium TUBE – Recess Downlight / Frost Glass / 7351			
Medium TUBE – Suspension / 1002			
Medium TUBE Optic – Suspension / 1002			
Luminaire Performance			
1110 - 4520 lm			
19 - 40 W			
55 – 122 lm/W			
COB LED / AC COB / High Power LED			
Beam Options			
Narrow Medium Wide Asymmetric Elliptical H			
Color Temperature			
2700K/ 3000K/ 4000K			
Controller			
On-Off/ 1-10V/ DALI			

On-Off/ 1-10V/ DALI AC COB with On-Off control



TUBE

Maxi TUBE Wall Up/Downlight





Maxi TUBE

Wall Downlight



Pole Light / Single Sided

Maxi TUBE

Maxi TUBE Suspension







Ø300

Maxi TUBE Wall Uplight





Maxi TUBE Pole Light / Double Sided




Maxi TUBE Surface Downlight



• 252 -



Maxi TUBE



Maxi TUBE

WALL LIGHT CEILING LIGHT POLE LIGHT

Maxi TUBE - Wall Up/Downlight / 5003 Maxi TUBE - Wall Downlight / 5006 Maxi TUBE - Wall Uplight / 5046 Maxi TUBE - Surface Downlight / 4003 Maxi TUBE - Recess Downlight / Clear Glass / 7304 Maxi TUBE - Suspension / 1016 Maxi TUBE - Pole Light / Single Sided / 7238 Maxi TUBE – Pole Light / Double Sided / 7239 Luminaire Performance 1070 - 14920 lm 20 - 152 W 53 - 127 lm/W COB LED/ AC COB/ High Power LED **Beam Options** Color Temperature 2700K/ 3000K/ 4000K Controller On-Off/ 1-10V/ DALI AC COB with On-Off control

